



## Product Model Number

CKO-CC20-075026-0405

### ✓ Model Number Definitions

**CKO-XXXX-XXXXXX-XXXX**




- A. Chun Kuang Optics Corp. Product
- B. Product Type: product abbreviation  
Ex:  
CH→CoB High Intensity  
CC→CoB Compact  
CS→Soft Shading for CoB LED  
HC→Holder for CoB LED

- C. Identity Code
- D. Lens / Fixture Size  
Ex: 075026=Φ75mm / Thickness=26mm (round up)
- E. Serial Numbers

The lens datasheet is applicable for **Citizen LED**, that manufactured by Chun Kuang Optics Corp.

### ✓ Dimensions (mm) : Φ75 x 25.4

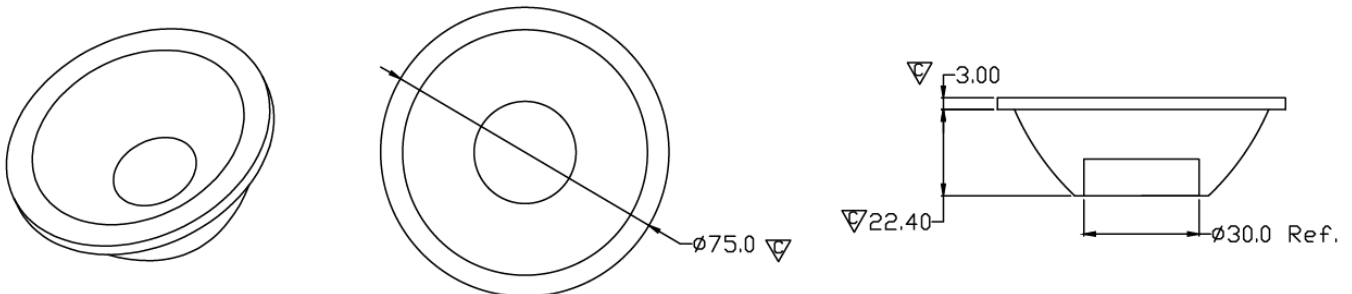

▽:Critical Dimension







## Optical Characteristics

Model Number	CKO-CC20-075026-0405		<p>"H" definition</p> <p>LES CoB</p>
LED	<b>CLU 710</b>		
LES / LED Size	Φ 8.5 mm		
FWHM (D50)	33°		
Field Angle (D10)	62°		
H (distance)	3.65mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	2378 lm	Measured @ 25.9 W	
Material	PC / UL94V2		

## cd/klm

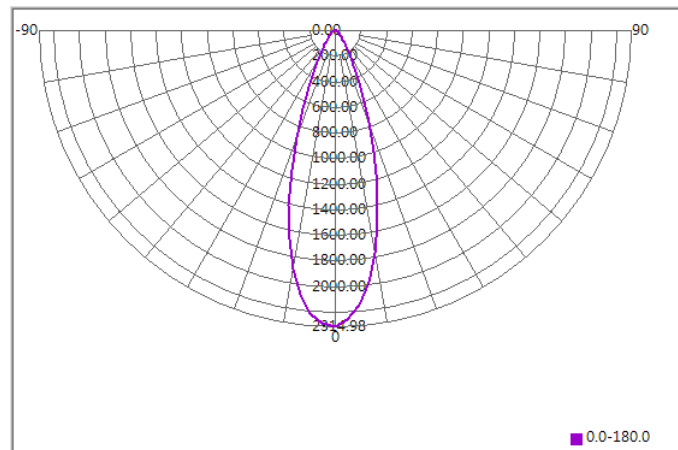

## Illuminance At Distances

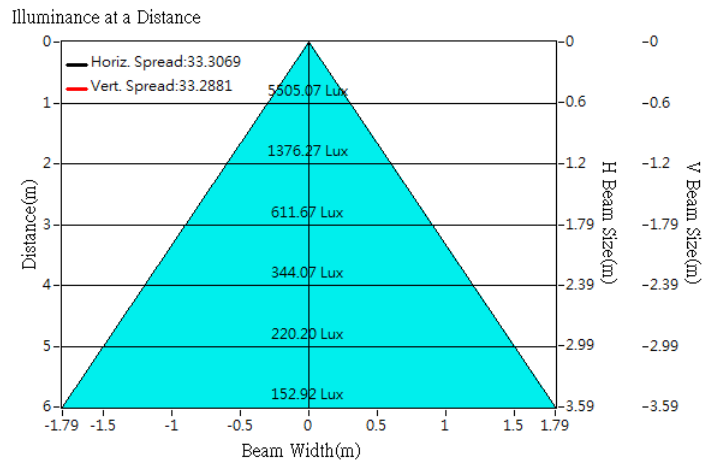





## Optical Characteristics

Model Number	CKO-CC20-075026-0405		<p>"H" definition</p>
LED	<b>CLU 711</b>		
LES / LED Size	Φ 8.5 mm		
FWHM (D50)	33°		
Field Angle (D10)	63°		
H (distance)	3.65mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	2715 lm	Measured @ 25.3 W	
Material	PC / UL94V2		

## cd/klm

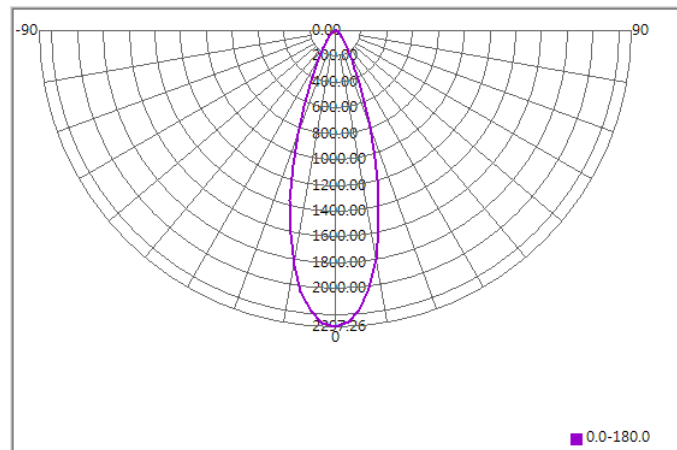

## Illuminance At Distances

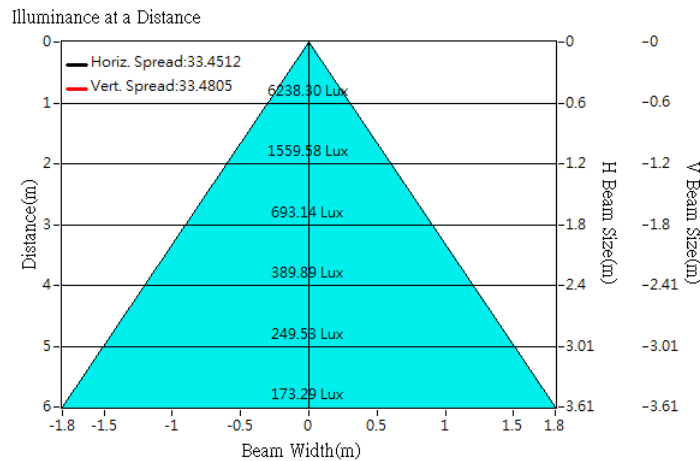





## Optical Characteristics

Model Number	CKO-CC20-075026-0405		<p>"H" definition</p>
LED	CLU 028		
LES / LED Size	Φ 9.8 mm		
FWHM (D50)	33°		
Field Angle (D10)	63°		
H (distance)	3.65mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	1613 lm	Measured @ 12.5 W	
Material	PC / UL94V2		

## cd/klm

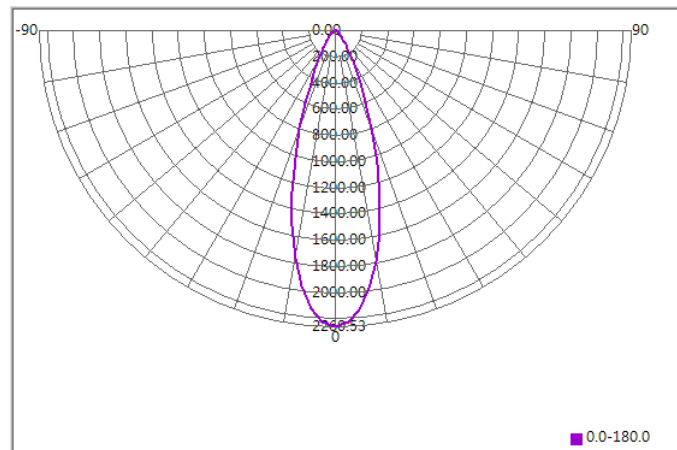

## Illuminance At Distances

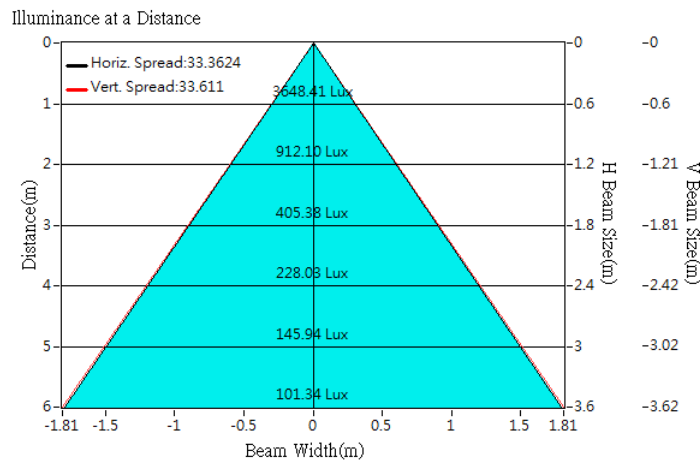





## Optical Characteristics

Model Number	CKO-CC20-075026-0405		<p>"H" definition</p> <p>LES CoB</p>
LED	CLU 026		
LES / LED Size	Φ 9.8 mm		
FWHM (D50)	33°		
Field Angle (D10)	63°		
H (distance)	3.65mm		
Dimension	Φ =75 mm, Thickness=33 mm		
Luminous Flux	1542 lm	Measured @ 12.5 W	
Material	PC / UL94V2		

## cd/klm

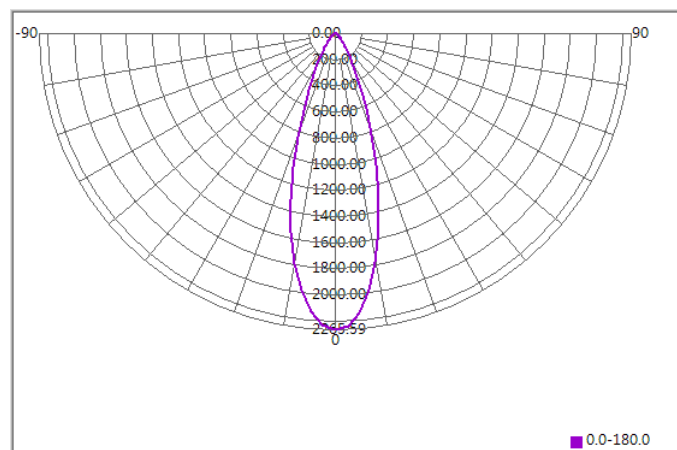

## Illuminance At Distances

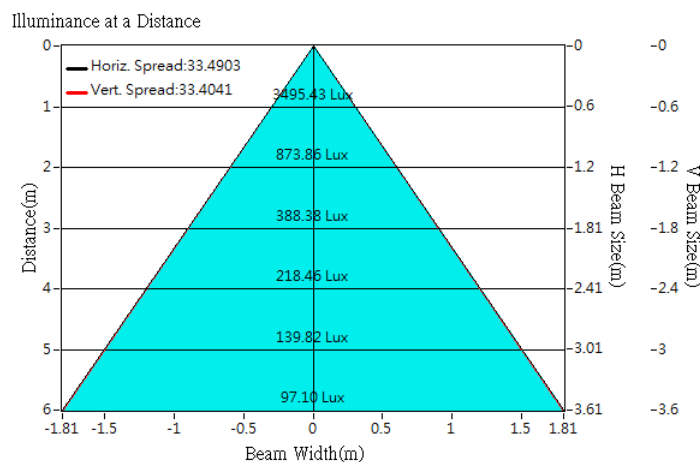





## Optical Characteristics

Model Number	CKO-CC20-075026-0405		<p>"H" definition</p>
LED	<b>CLU 721</b>		
LES / LED Size	Φ 11 mm		
FWHM (D50)	34°		
Field Angle (D10)	64°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	4213 lm	Measured @ 38.3 W	
Material	PC / UL94V2		

## cd/klm

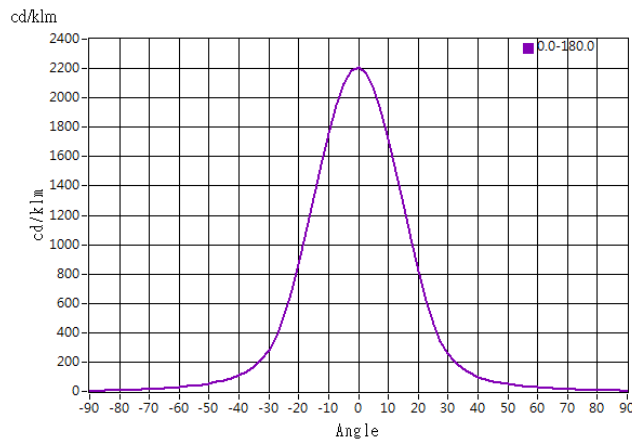

## Illuminance At Distances

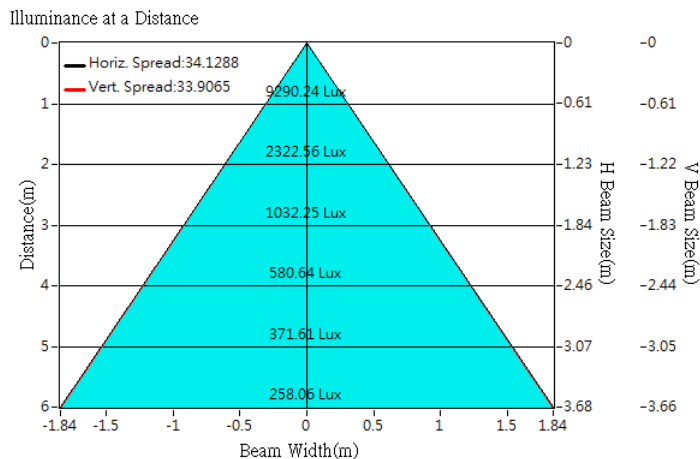





## Optical Characteristics

Model Number	CKO-CC20-075026-0405		<p>"H" definition</p> <p>LES CoB</p>
LED	<b>CLU 730</b>		
LES / LED Size	Φ 13 mm		
FWHM (D50)	36°		
Field Angle (D10)	67°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	4416 lm	Measured @ 63.2 W	
Material	PC / UL94V2		

## cd/klm

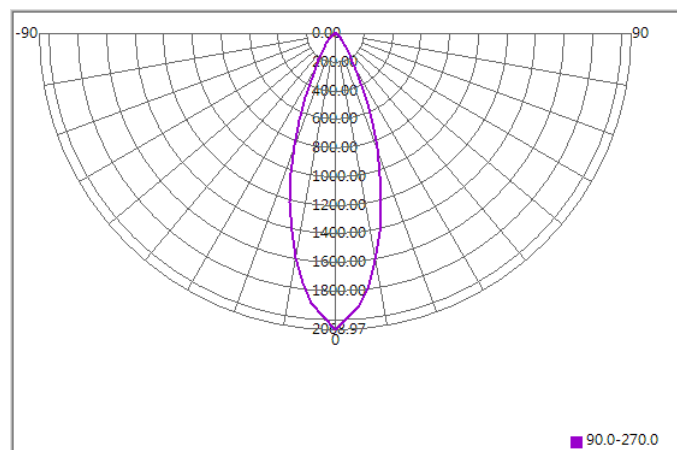

## Illuminance At Distances

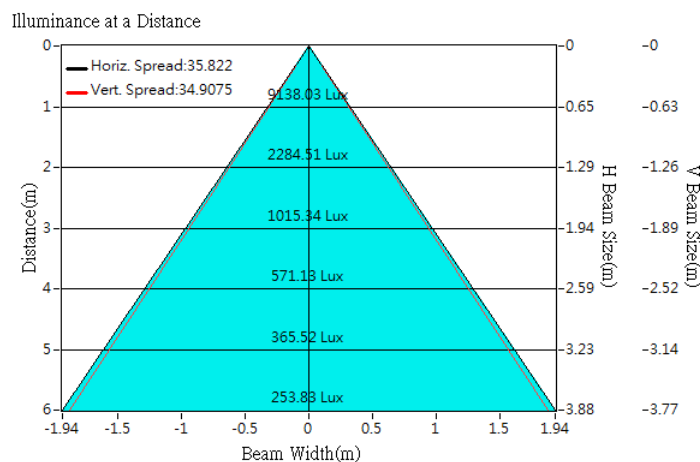





## Optical Characteristics

Model Number	CKO-CC20-075026-0405		<p>"H" definition</p> <p>LES CoB</p>
LED	CLU 036		
LES / LED Size	Φ 14.5 mm		
FWHM (D50)	37°		
Field Angle (D10)	69°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	1952 lm	Measured @ 15.6 W	
Material	PC / UL94V2		

## cd/klm

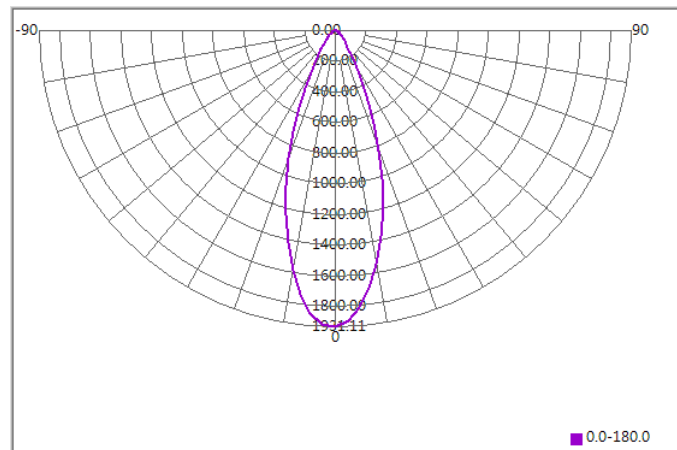

## Illuminance At Distances

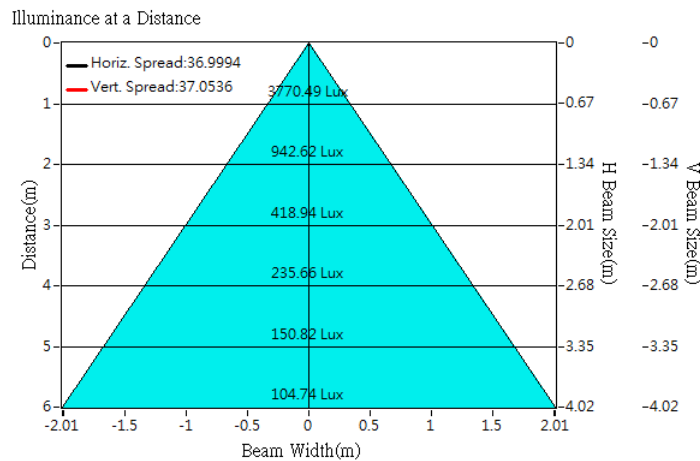




## Optical Characteristics

Model Number	CKO-CC20-075026-0405		<p>"H" definition</p>
LED	<b>CLU 038</b>		
LES / LED Size	Φ 14.5 mm		
FWHM (D50)	36°		
Field Angle (D10)	67°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	2851 lm	Measured @ 24.8 W	
Material	PC / UL94V2		

## cd/klm

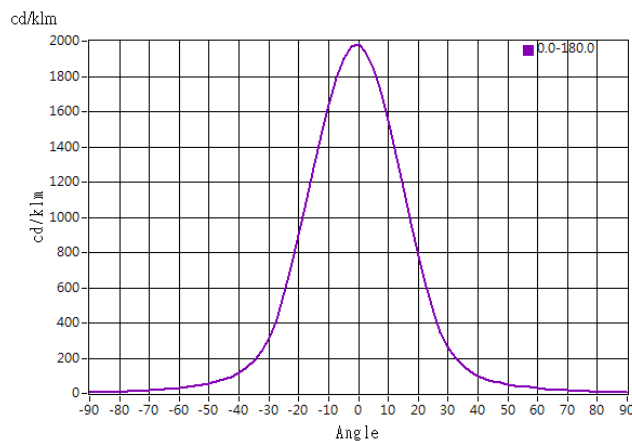

## Illuminance At Distances

