



Product Model Number

CKO-CH15-092043-2301

✓ Model Number Definitions

CKO-XXXX-XXXXXX-XXXX

↑
(A)

↑
(B)

↑
(C)

↑
(D)

↑
(E)




- A. Chun Kuang Optics Corp. Product
- B. Product Type: product abbreviation
Ex:
CH→CoB High Intensity
CC→CoB Compact
CS→Soft Shading for CoB LED
HC→Holder for CoB LED

- C. Identity Code
- D. Lens / Fixture Size
Ex: 075026=Φ75mm / Thickness=26mm (round up)
- C. Serial Numbers

The lens datasheet is applicable for **CREE LED**, that manufactured by Chun Kuang Optics Corp.

✓ Dimensions (mm) : Φ92 x 43

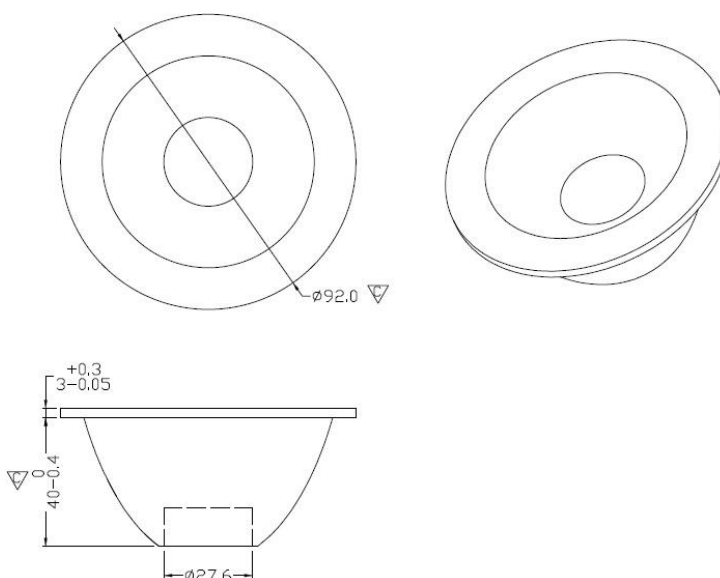

▽:Critical Dimension

Chun Kuang Optics Corp.

2021/11/22


5F.,No. 122-8, Jhonghua Rd, Hukou Township, Hsinchu County 303, Taiwan

TEL : +886-3-6960168 / FAX : +886-3-6960228 / E-mail: sales@ckoptics.com


[illegible]




Optical Characteristics

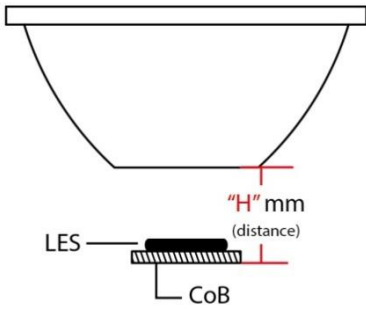Model Number	CKO-CH15-092043-2301		
LED	CREE CXB1816		
LES / LED Size	Φ 12 mm		
FWHM (D50)	20°		
Field Angle (D10)	37°		
H (distance)	3.65 mm		
Dimension	Φ =92 mm, Thickness=43 mm		
Luminous Flux	1791 lm	Measured @ 15.7 W	
Material	PC / UL94V2		

cd/klm

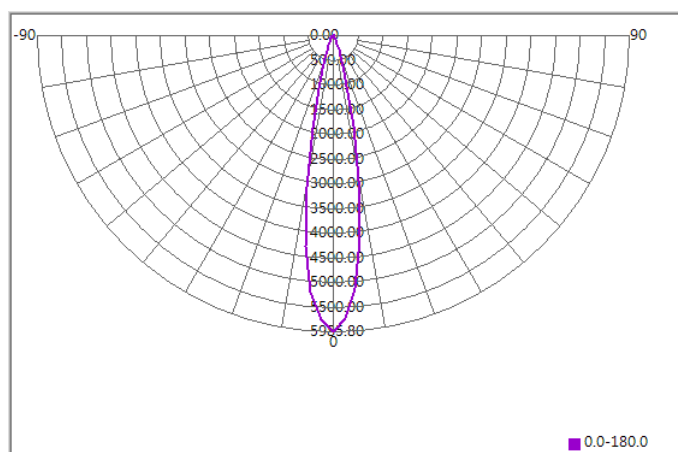


Illuminance At Distances

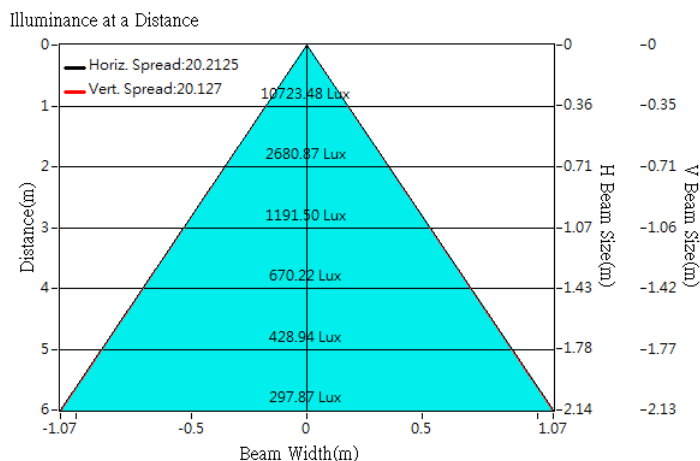





Optical Characteristics

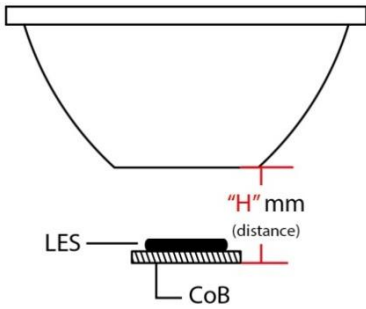Model Number	CKO-CH15-092043-2301		“H” definition 
LED	CREE CXB1820		
LES / LED Size	Φ 12 mm		
FWHM (D50)	20°		
Field Angle (D10)	37°		
H (distance)	3.65 mm		
Dimension	Φ =92 mm, Thickness=43 mm		
Luminous Flux	2310 lm	Measured @ 19.4 W	
Material	PC / UL94V2		

cd/klm

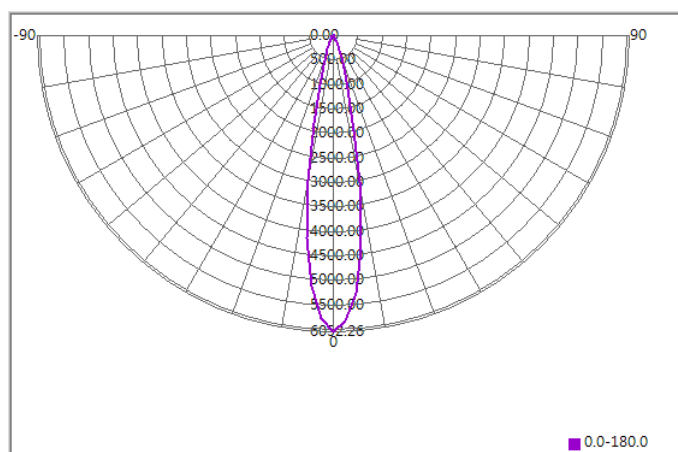


Illuminance At Distances

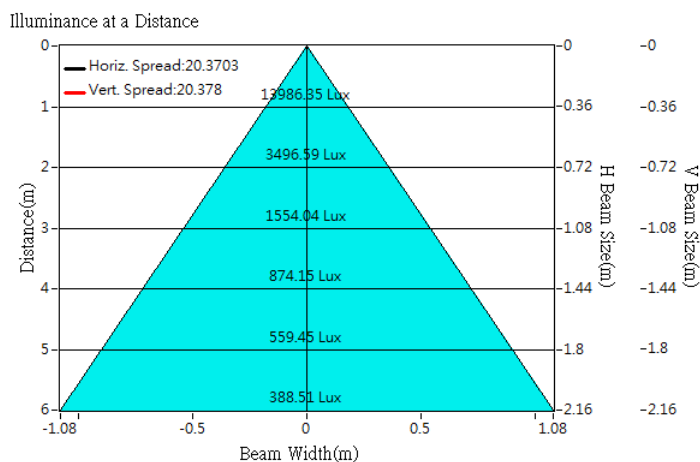





Optical Characteristics

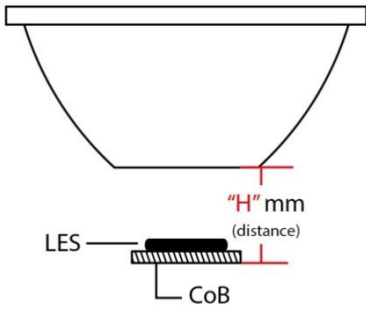Model Number	CKO-CH15-092043-2301		
LED	CMA1825		
LES / LED Size	Φ 12 mm		
FWHM (D50)	21°		
Field Angle (D10)	37°		
H (distance)	3.65 mm		
Dimension	Φ =92 mm, Thickness=43 mm		
Luminous Flux	2868 lm	Measured @ 24.5 W	
Material	PC / UL94V2		

cd/klm

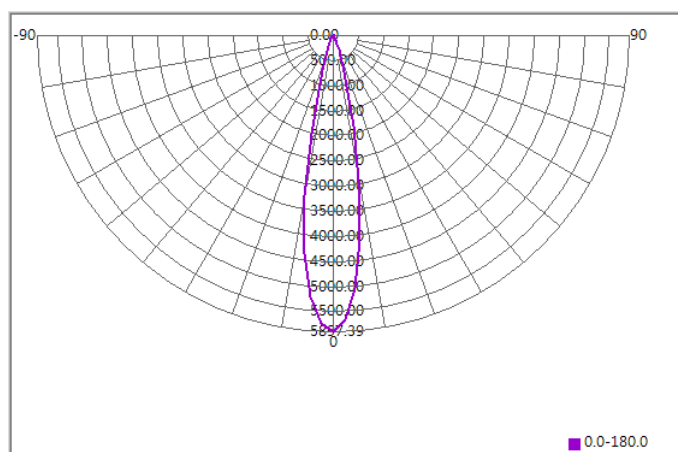


Illuminance At Distances

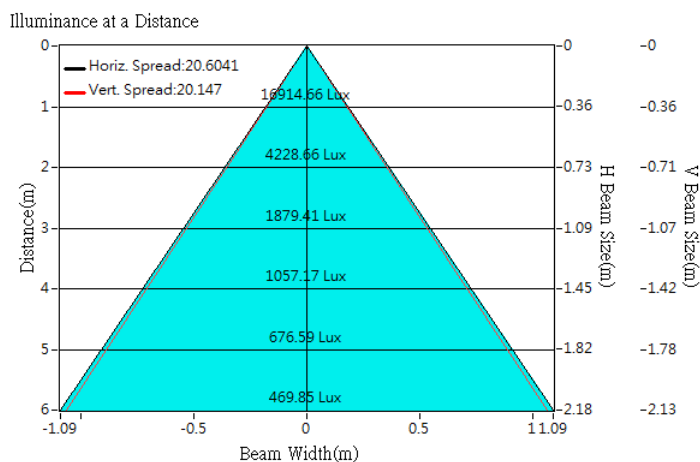





Optical Characteristics

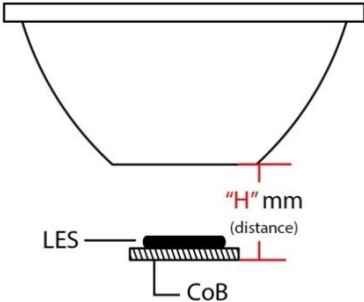Model Number	CKO-CH15-092043-2301		
LED	CXA1830		
LES / LED Size	Φ 14 mm		
FWHM (D50)	22°		
Field Angle (D10)	40°		
H (distance)	3.65 mm		
Dimension	Φ =92 mm, Thickness=43 mm		
Luminous Flux	2516 lm	Measured @ 29.9 W	
Material	PC / UL94V2		

cd/klm

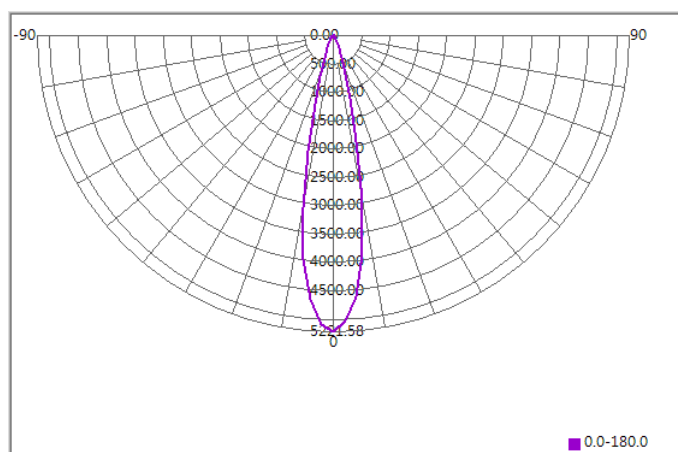


Illuminance At Distances

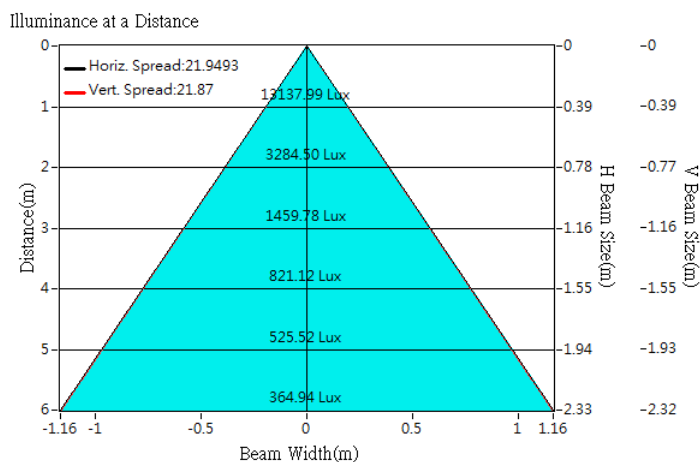





Optical Characteristics

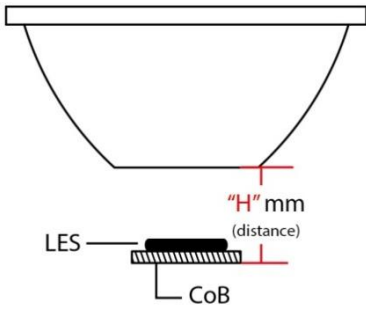Model Number	CKO-CH15-092043-2301		
LED	CREE CXB1830		
LES / LED Size	Φ 14 mm		
FWHM (D50)	22°		
Field Angle (D10)	40°		
H (distance)	3.65 mm		
Dimension	Φ =92 mm, Thickness=43 mm		
Luminous Flux	2606 lm	Measured @ 27.7 W	
Material	PC / UL94V2		

cd/klm

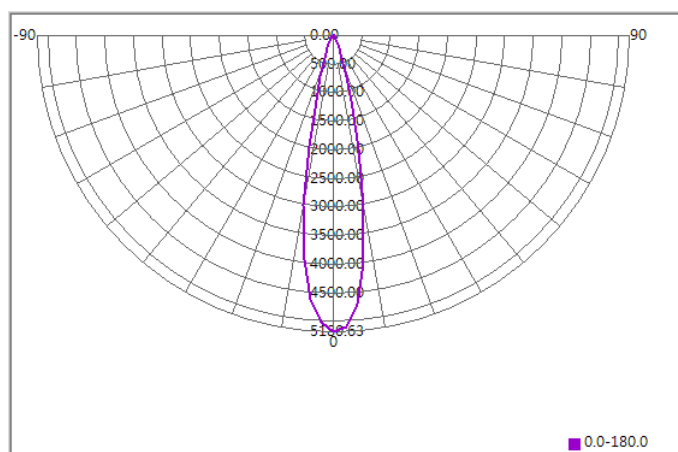


Illuminance At Distances

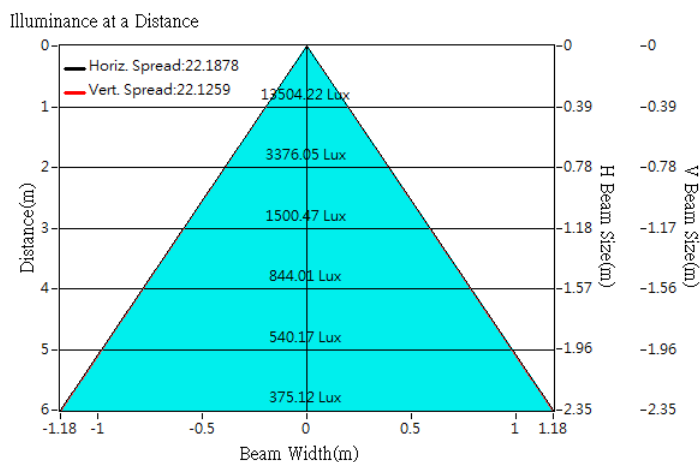





Optical Characteristics

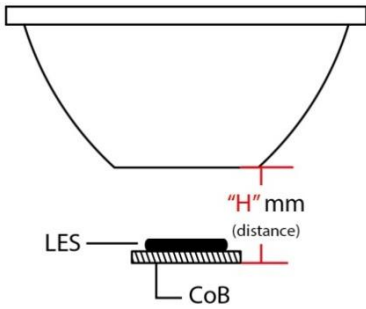Model Number	CKO-CH15-092043-2301		
LED	CMA1840		
LES / LED Size	Φ 14 mm		
FWHM (D50)	23°		
Field Angle (D10)	41°		
H (distance)	3.65 mm		
Dimension	Φ =92 mm, Thickness=43 mm		
Luminous Flux	4415 lm	Measured @ 38 W	
Material	PC / UL94V2		

cd/klm

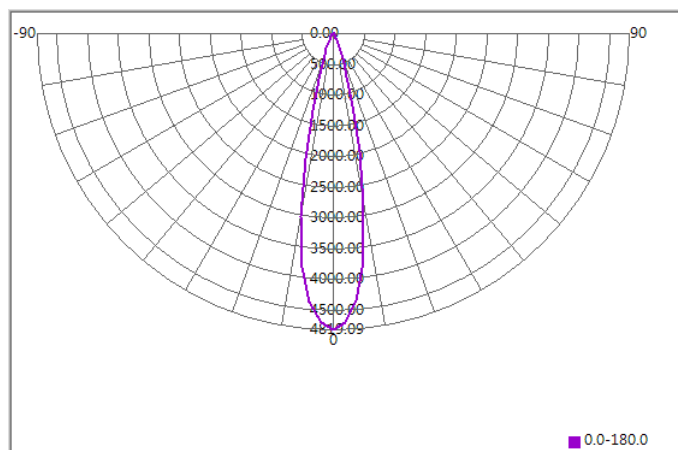


Illuminance At Distances

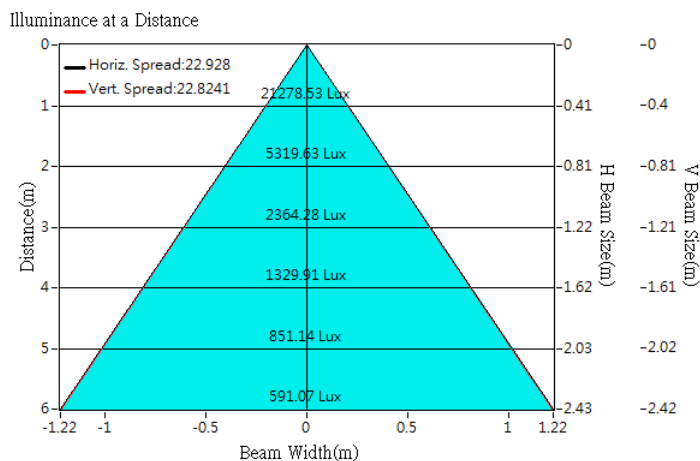





Optical Characteristics

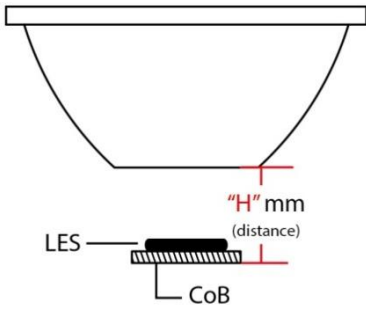Model Number	CKO-CH15-092043-2301		"H" definition 
LED	CMT1922		
LES / LED Size	Φ 14.5 mm		
FWHM (D50)	23°		
Field Angle (D10)	41°		
H (distance)	3.65 mm		
Dimension	Φ =92 mm, Thickness=43 mm		
Luminous Flux	2566 lm	Measured @ 21.2 W	
Material	PC / UL94V2		

cd/klm

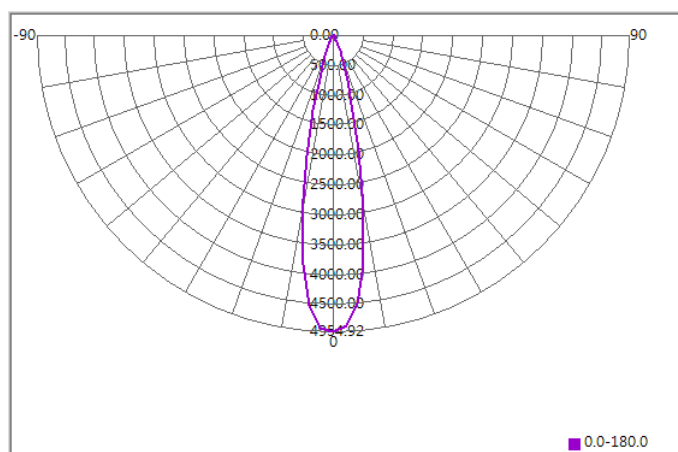


Illuminance At Distances

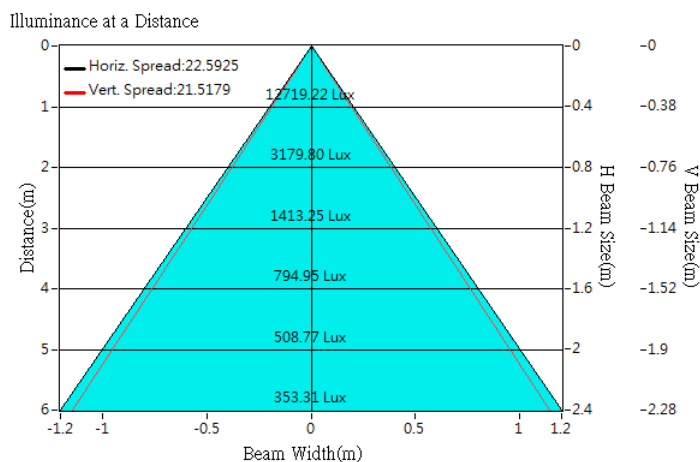





Optical Characteristics

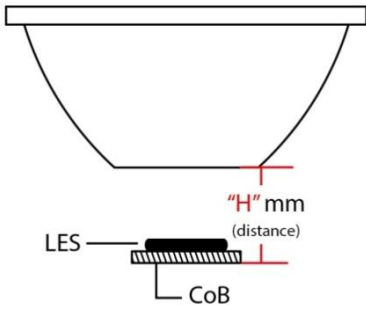Model Number	CKO-CH15-092043-2301		
LED	CMT1925		
LES / LED Size	Φ 14.5 mm		
FWHM (D50)	23°		
Field Angle (D10)	42°		
H (distance)	3.65 mm		
Dimension	Φ =92 mm, Thickness=43 mm		
Luminous Flux	2960 lm	Measured @ 24.3 W	
Material	PC / UL94V2		

cd/klm

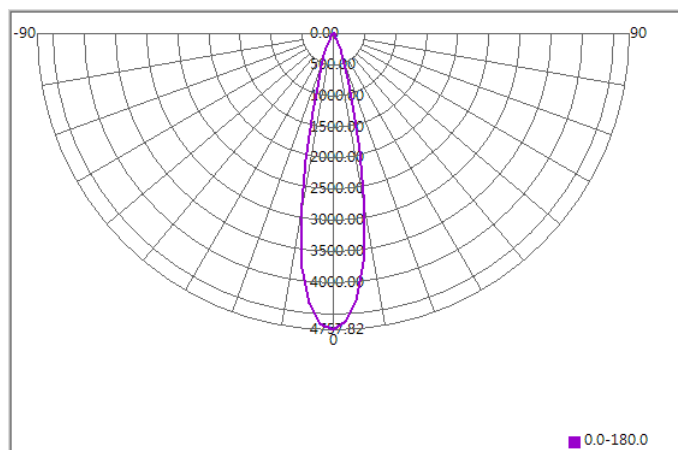


Illuminance At Distances

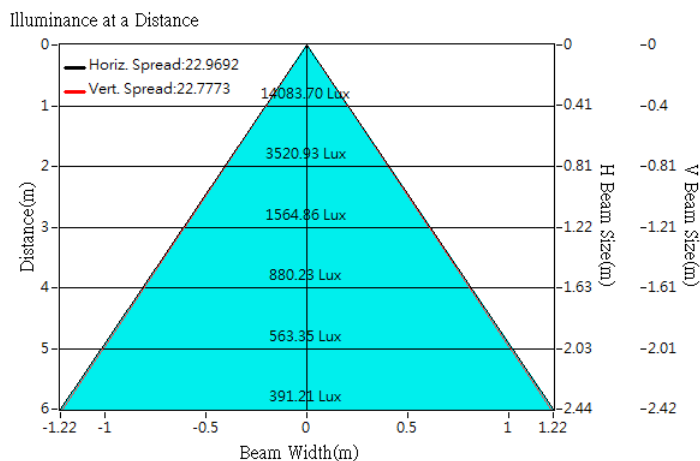





Optical Characteristics

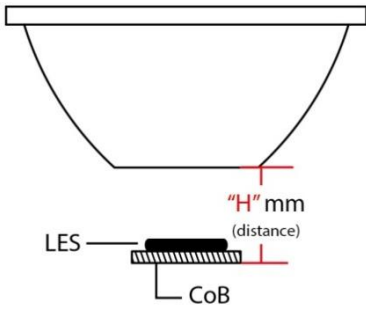Model Number	CKO-CH15-092043-2301		"H" definition 
LED	CMT1930		
LES / LED Size	Φ 14.5 mm		
FWHM (D50)	22°		
Field Angle (D10)	41°		
H (distance)	3.65 mm		
Dimension	Φ =92 mm, Thickness=43 mm		
Luminous Flux	3285 lm	Measured @ 28.1 W	
Material	PC / UL94V2		

cd/klm

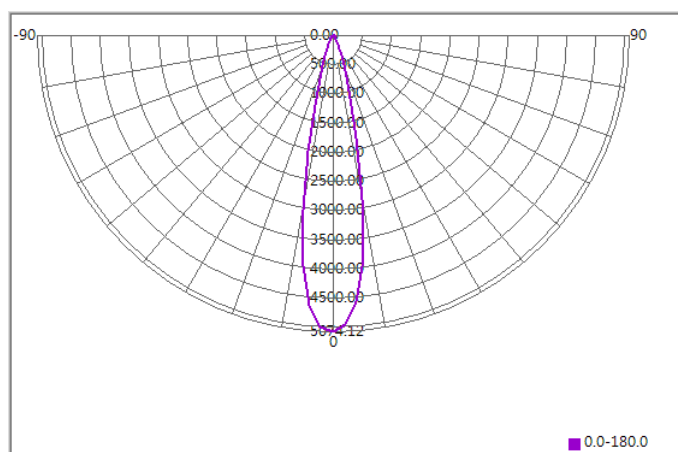


Illuminance At Distances

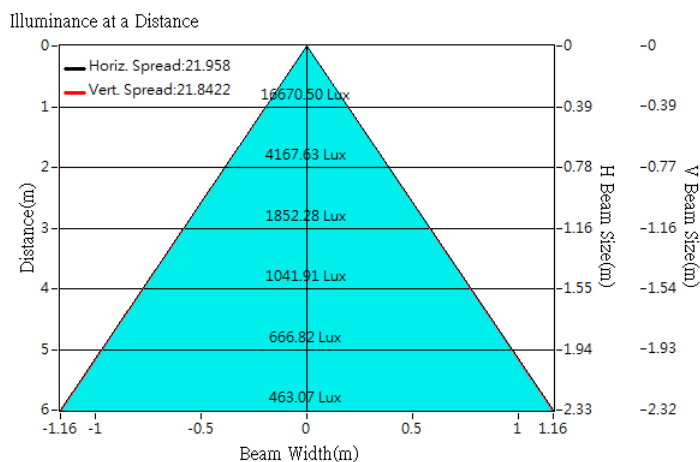





Optical Characteristics

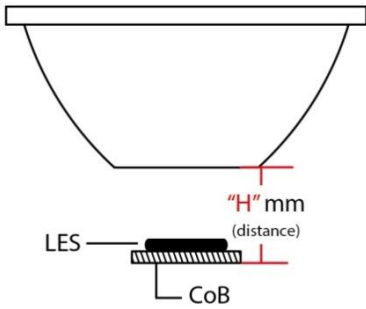Model Number	CKO-CH15-092043-2301		
LED	CMT1945		
LES / LED Size	Φ 14.5 mm		
FWHM (D50)	22°		
Field Angle (D10)	42°		
H (distance)	3.65 mm		
Dimension	Φ =92 mm, Thickness=43 mm		
Luminous Flux	4874 lm	Measured @ 42.3 W	
Material	PC / UL94V2		

cd/klm

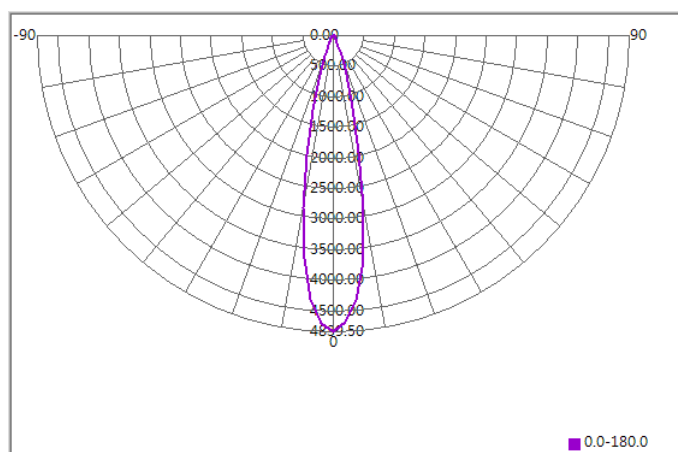

Illuminance At Distances

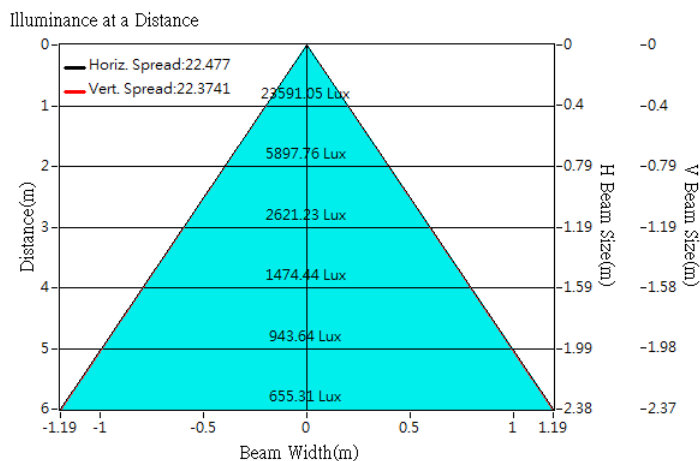





Optical Characteristics

Model Number	CKO-CH15-092043-2301		
LED	CXB 2530		
LES / LED Size	Φ 19 mm		
FWHM (D50)	26°		
Field Angle (D10)	49°		
H (distance)	3.65 mm		
Dimension	Φ =92 mm, Thickness=43 mm		
Luminous Flux	2970 lm	Measured @ 27.6 W	
Material	PC / UL94V2		

cd/klm

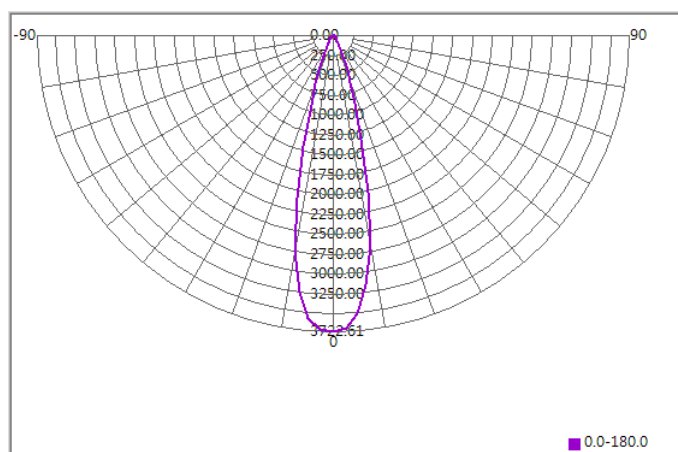


Illuminance At Distances

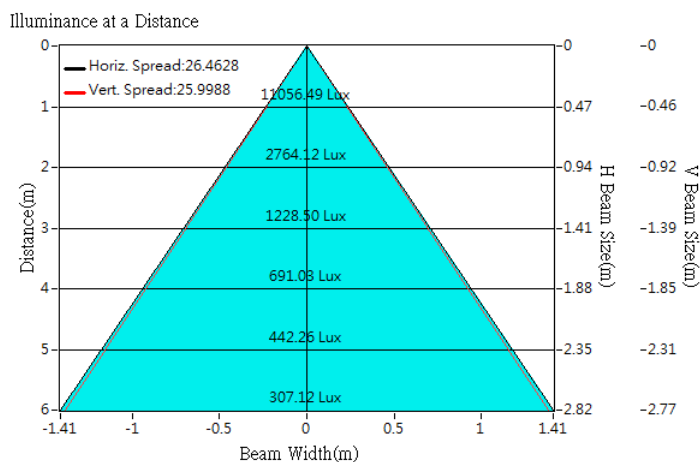



Lens Accessories - CoB Holder

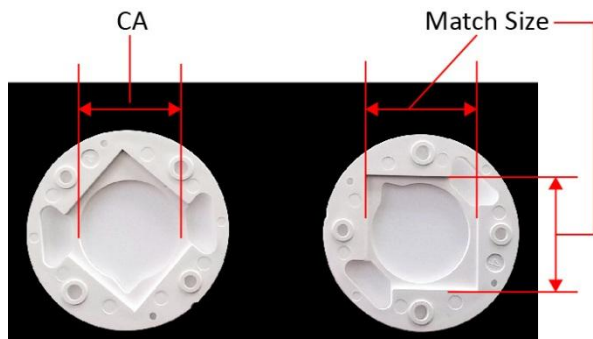

Example of LES Area & LED Size
Dimension Locations

Product Model	Match Size (mm)	CA (mm)	Material	Applicability
CKO-HC13-131307-6411	13.6 x 13.6	Φ 7.8	PBT	CREE CXA 13XX
CKO-HC13-161610-6412	16.1 x 16.1	Φ 10.8	PBT	CREE CXA 15XX
CKO-HC13-181816-6413	18.1 x 18.1	Φ 16.4	PBT	CREE CXA 18XX
CKO-HC13-242421-6414	24.1 x 24.1	Φ 21.3	PBT	CREE CXA 25XX
CKO-HC13-272725-6415	27.6 x 27.6	Φ 25.3	PBT	CREE CXA 30XX