



Product Model Number

CKO-M312-035011-2401

✓ Model Number Definitions

CKO-XXXX-XXXXXX-XXXX




- A. Chun Kuang Optics Corp. Product
- B. Product Type: product abbreviation
Ex:
CH→CoB High Intensity
CC→CoB Compact
CS→Soft Shading for CoB LED
HC→Holder for CoB LED

- C. Identity Code
- D. Lens / Fixture Size
Ex: 075026=Φ75mm / Thickness=26mm (round up)
- C. Serial Numbers

The lens datasheet is applicable for **Cree** LED, that manufactured by Chun Kuang Optics Corp.

✓ Dimensions (mm) : Φ35 x 10.9

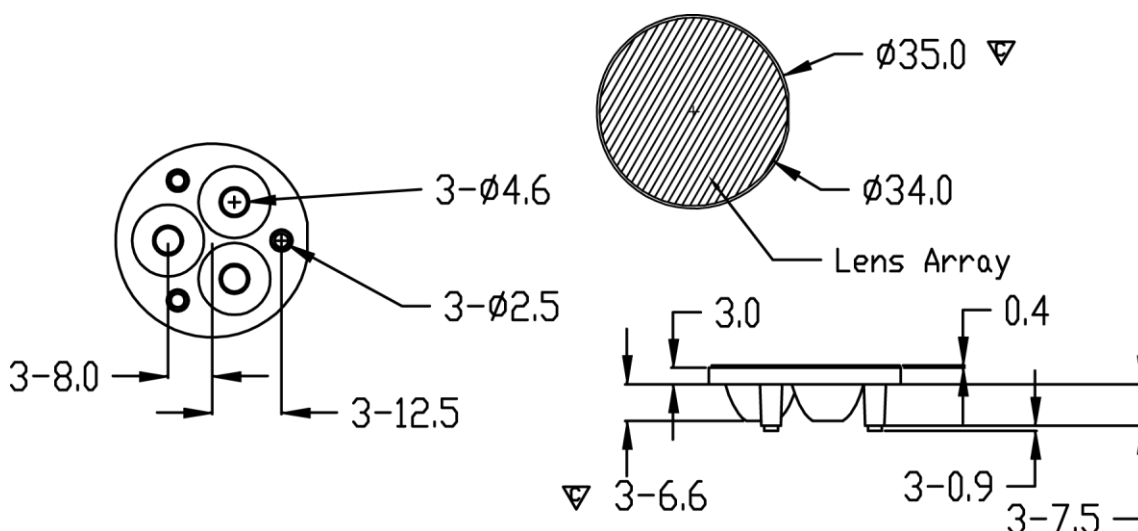

▽:Critical Dimension


[illegible]




Optical Characteristics

Model Number	CKO-M312-035011-2401	
LED	XB-D	
LES / LED Size	Φ 2.5 x 2.5	
FWHM (D50)	16°	
Field Angle (D10)	32°	
Dimension	Φ =35 mm, Thickness=10.9 mm	
Luminous Flux	257 lm	Measured @ 3.2 W
Material	PC / UL94V0	

cd/klm

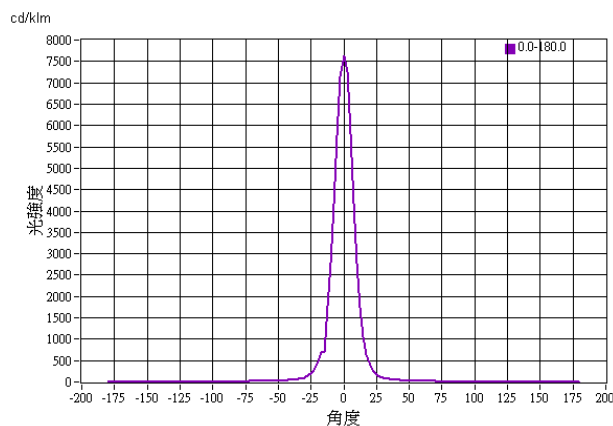

Illuminance At Distances

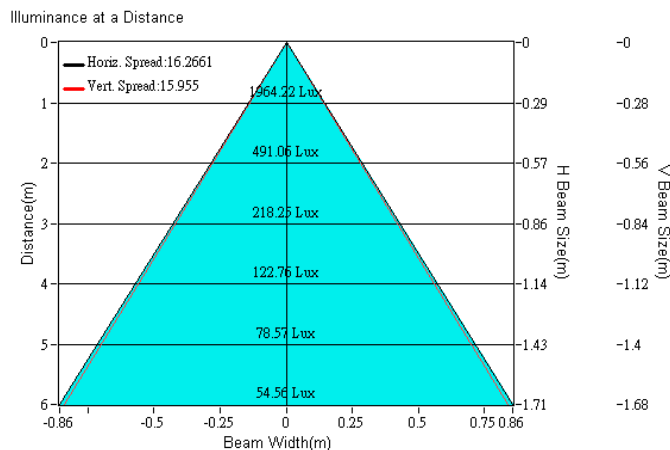





Optical Characteristics

Model Number	CKO-M312-035011-2401	
LED	XB-H	
LES / LED Size	Φ 2.5 x 2.5	
FWHM (D50)	18°	
Field Angle (D10)	37°	
Dimension	Φ =35 mm, Thickness=10.9 mm	
Luminous Flux	332 lm	Measured @ 3.0 W
Material	PC / UL94V0	

cd/klm

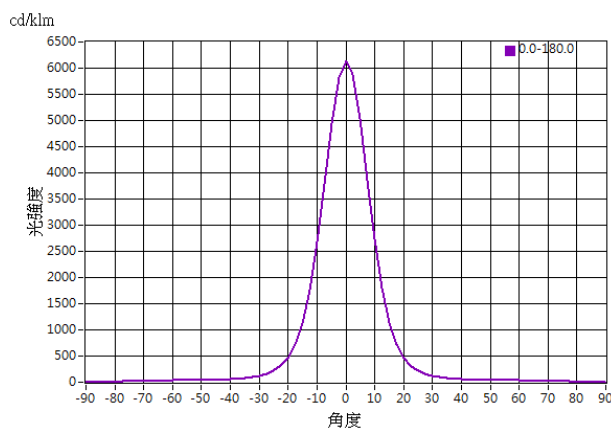

Illuminance At Distances

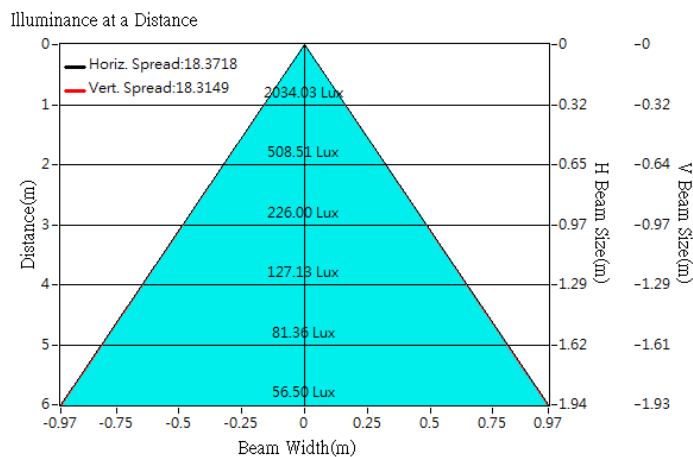





Optical Characteristics

Model Number	CKO-M312-035011-2401	
LED	XP-E	
LES / LED Size	Φ 3.5 x 3.5	
FWHM (D50)	16°	
Field Angle (D10)	30°	
Dimension	Φ =35 mm, Thickness=10.9 mm	
Luminous Flux	186 lm	Measured @ 3.4 W
Material	PC / UL94V0	

cd/klm

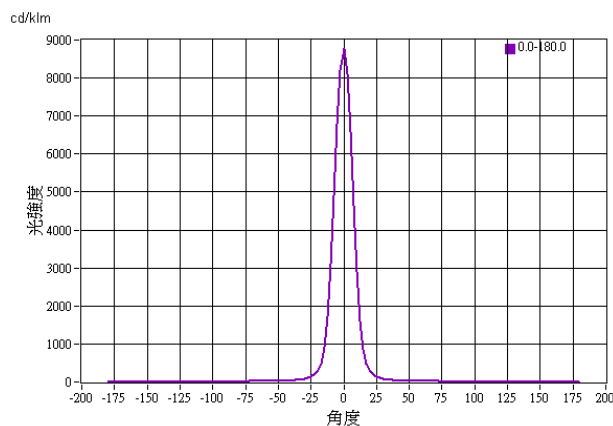

Illuminance At Distances

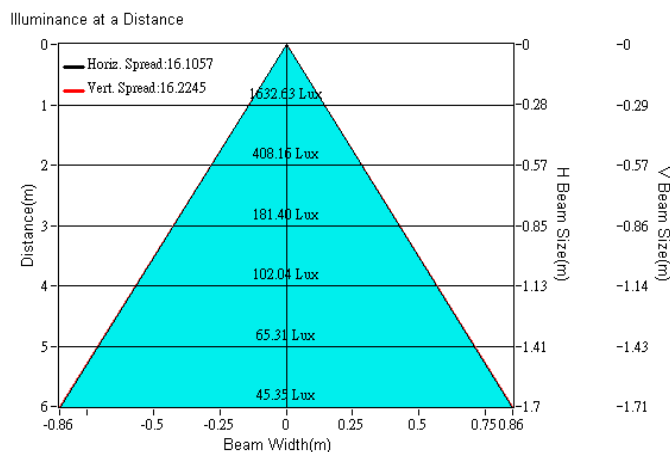





Optical Characteristics

Model Number	CKO-M312-035011-2401	
LED	XP-G	
LES / LED Size	Φ 3.5 x 3.5	
FWHM (D50)	20°	
Field Angle (D10)	37°	
Dimension	Φ =35 mm, Thickness=10.9 mm	
Luminous Flux	255 lm	Measured @ 3.0 W
Material	PC / UL94V0	

cd/klm

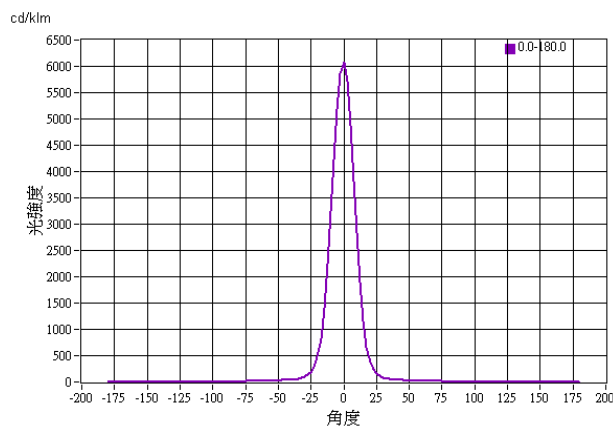

Illuminance At Distances

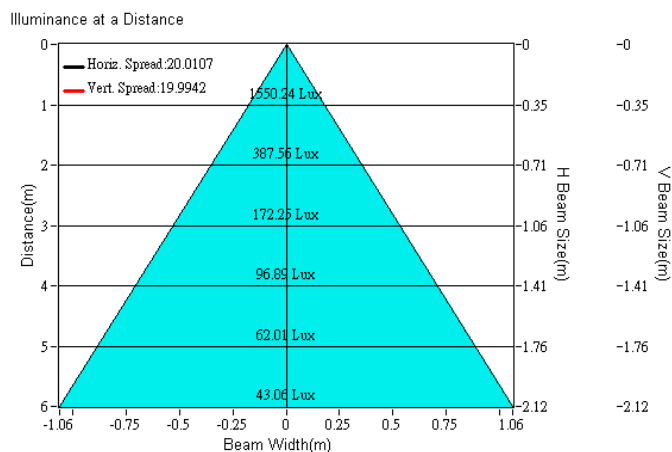




Optical Characteristics

Model Number	CKO-M312-035011-2401	
LED	XP-G2	
LES / LED Size	Φ 3.5 x 3.5	
FWHM (D50)	19°	
Field Angle (D10)	37°	
Dimension	Φ =35 mm, Thickness=10.9 mm	
Luminous Flux	335 lm	Measured @ 3.0 W
Material	PC / UL94V0	

cd/klm

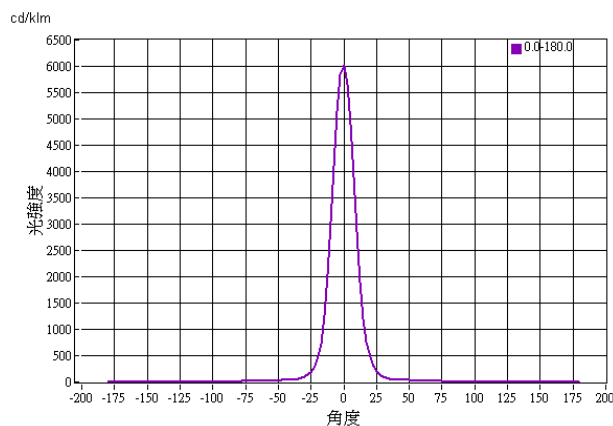

Illuminance At Distances

