



Product Model Number

CKO-SA20-075026-0411

✓ Model Number Definitions

CKO-XXXX-XXXXXX-XXXX






- A. Chun Kuang Optics Corp. Product
- B. Product Type: product abbreviation
Ex:
CH→CoB High Intensity
CC→CoB Compact
CS→Soft Shading for CoB LED
HC→Holder for CoB LED

- C. Identity Code
- D. Lens / Fixture Size
Ex: 075026=Φ75mm / Thickness=26mm (round up)
- C. Serial Numbers

The lens datasheet is applicable for **Philips LED**, that manufactured by Chun Kuang Optics Corp.

✓ Dimensions (mm) : Φ75 x 25.4

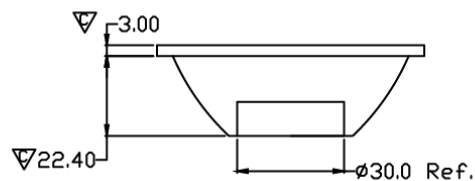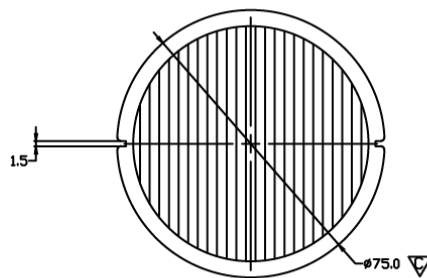


▽:Critical Dimension




Optical Characteristics

Model Number	CKO-SA20-075026-0411		<p>"H" definition</p>
LED	Fortimo SLM 1203 L09 G6		
LES / LED Size	Φ 9 mm		
FWHM (D50)	39°x45°		
Field Angle (D10)	70°x89°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	1132 lm	Measured @ 10.4 W	
Material	PC / UL94V2		

cd/klm

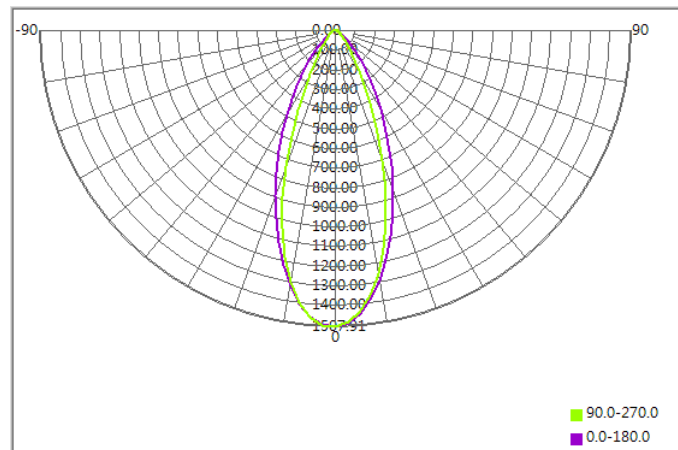

Illuminance At Distances

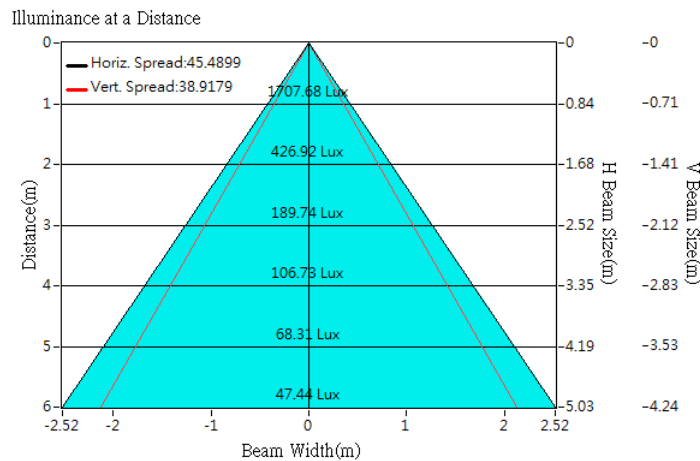





Optical Characteristics

Model Number	CKO-SA20-075026-0411		<p>"H" definition</p>
LED	Fortimo SLM PW 1204 L09 G7		
LES / LED Size	Φ 9 mm		
FWHM (D50)	40°x46°		
Field Angle (D10)	70°x90°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	1552 lm	Measured @ 12.4 W	
Material	PC / UL94V2		

cd/klm

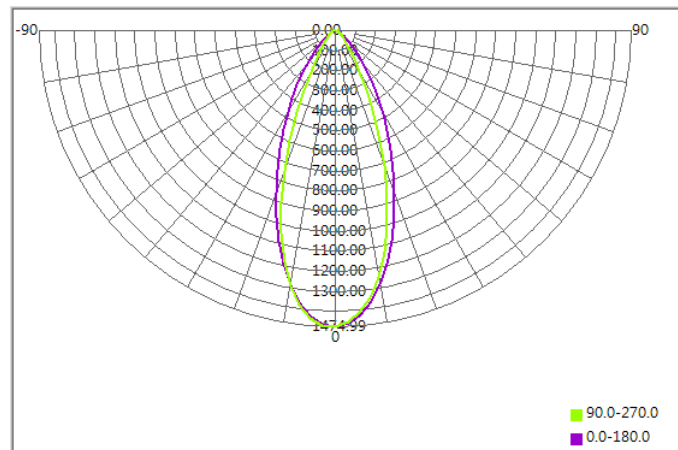

Illuminance At Distances

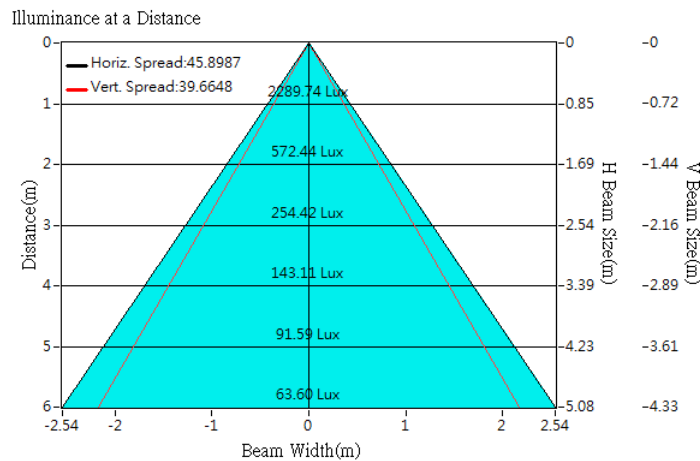





Optical Characteristics

Model Number	CKO-SA20-075026-0411		<p>"H" definition</p>
LED	Fortimo SLM 1201 L09 G7N		
LES / LED Size	Φ 9.8 mm		
FWHM (D50)	40°x46°		
Field Angle (D10)	71°x90°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	410 lm	Measured @ 3.0 W	
Material	PC / UL94V2		

cd/klm

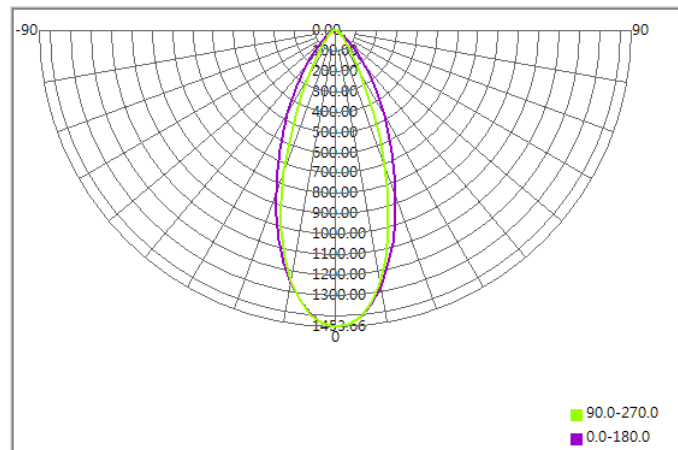

Illuminance At Distances

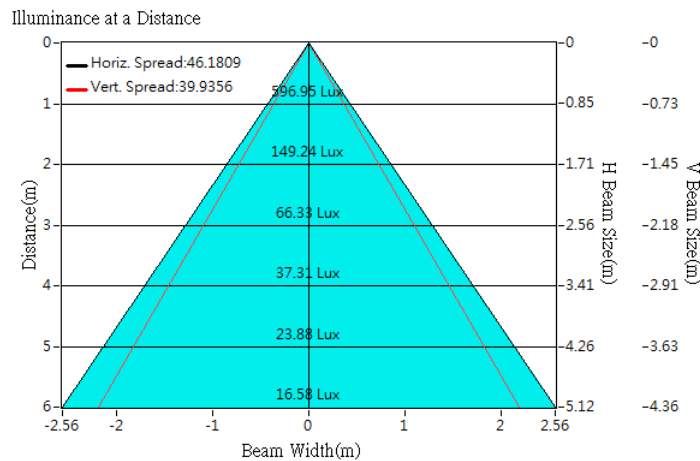





Optical Characteristics

Model Number	CKO-SA20-075026-0411		<p>"H" definition</p>
LED	Fortimo SLM 1203 L09 G7N		
LES / LED Size	Φ 9.8 mm		
FWHM (D50)	40°x46°		
Field Angle (D10)	71°x90°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	1174 lm	Measured @9.6 W	
Material	PC / UL94V2		

cd/klm

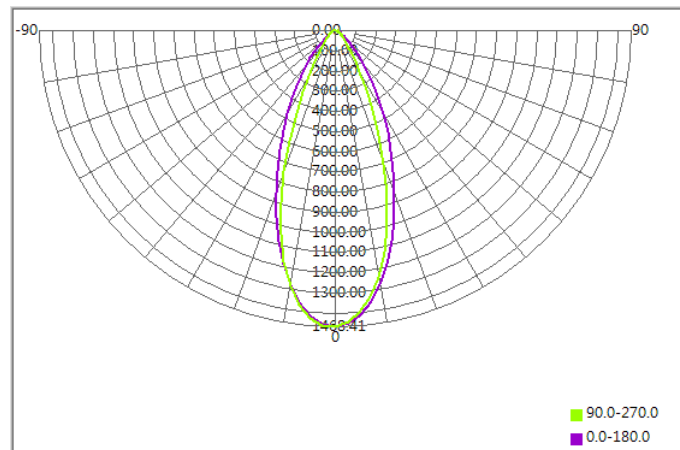

Illuminance At Distances

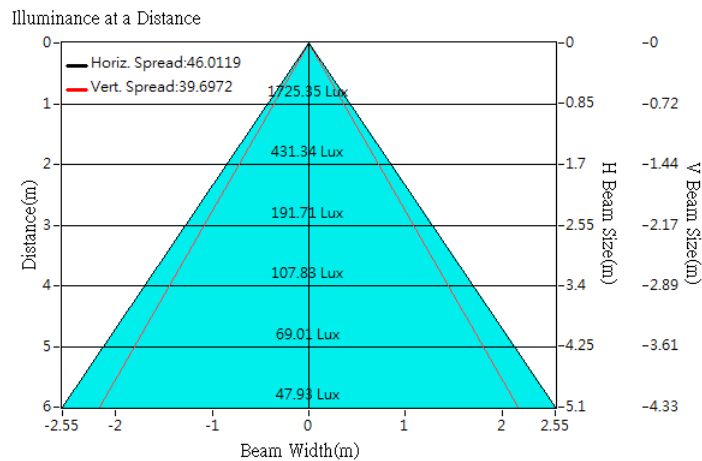





Optical Characteristics

Model Number	CKO-SA20-075026-0411		<p>"H" definition</p>
LED	Fortimo SLM 1204 L09 G7N		
LES / LED Size	Φ 9.8 mm		
FWHM (D50)	40°x46°		
Field Angle (D10)	70°x90°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	1552 lm	Measured @ 12.4 W	
Material	PC / UL94V2		

cd/klm

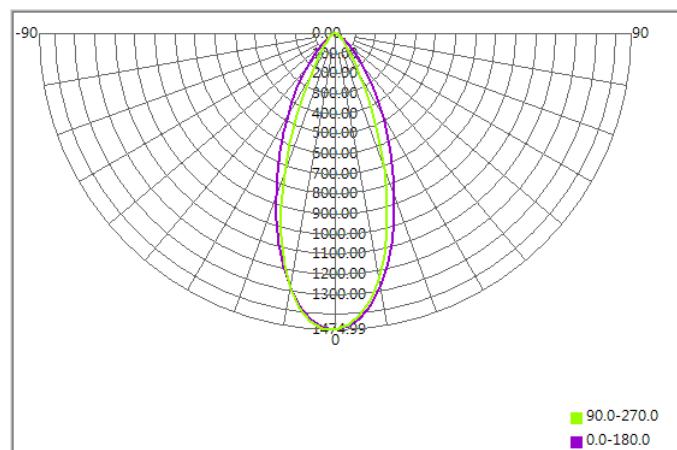

Illuminance At Distances

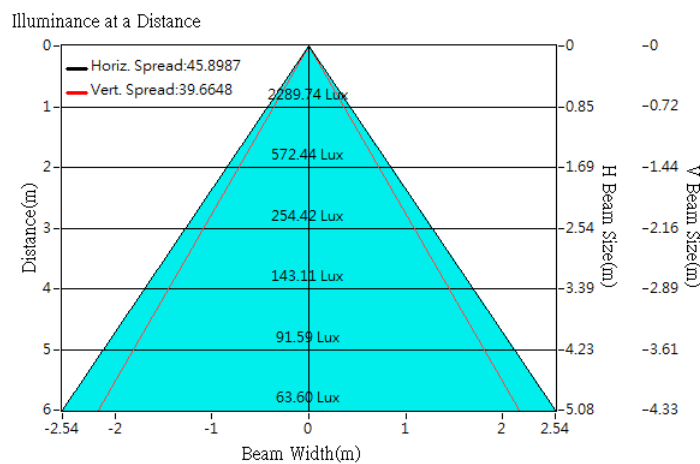





Optical Characteristics

Model Number	CKO-SA20-075026-0411		<p>"H" definition</p> <p>LES CoB</p>
LED	Fortimo SLM 1205 L13 G7		
LES / LED Size	Φ 13 mm		
FWHM (D50)	40°x47°		
Field Angle (D10)	73°x92°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	1681 lm	Measured @ 17.7 W	
Material	PC / UL94V2		

cd/klm

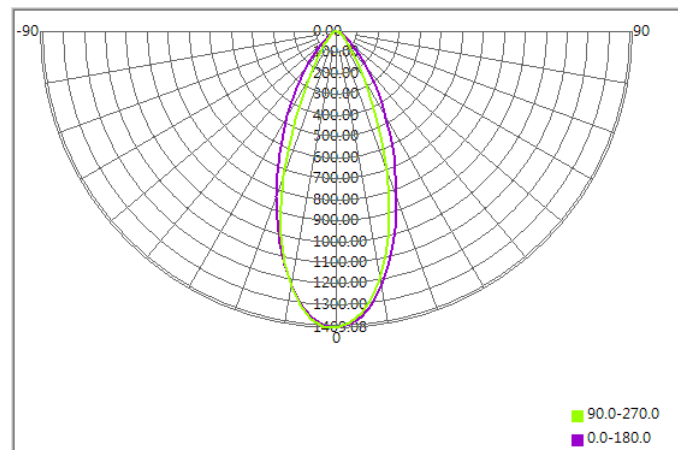

Illuminance At Distances

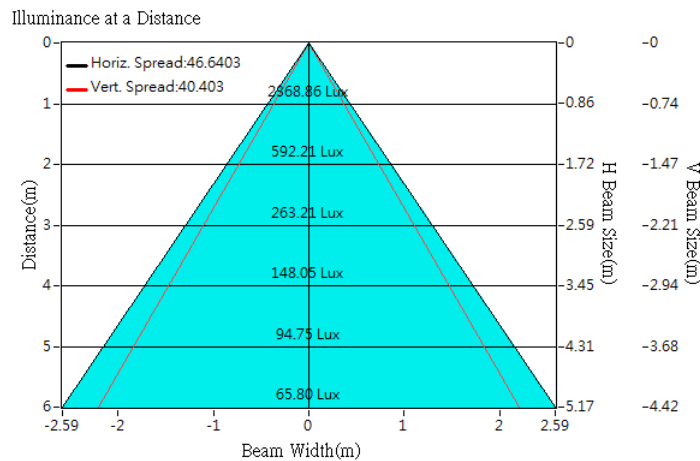





Optical Characteristics

Model Number	CKO-SA20-075026-0411		<p>"H" definition</p>
LED	Fortimo SLM 1205 L15 G7N		
LES / LED Size	Φ 14.5 mm		
FWHM (D50)	40°x46°		
Field Angle (D10)	74°x91°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	2031 lm	Measured @ 15.3 W	
Material	PC / UL94V2		

cd/klm

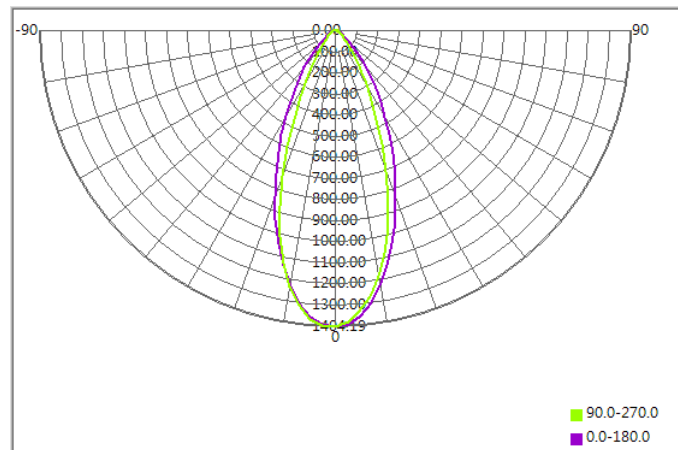

Illuminance At Distances

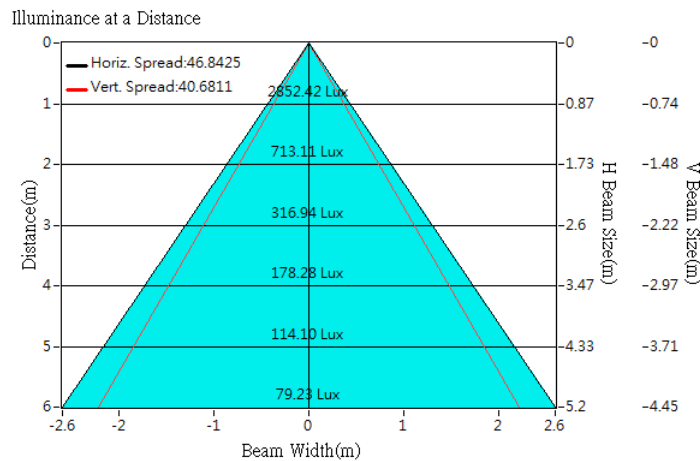





Optical Characteristics

Model Number	CKO-SA20-075026-0411		<p>"H" definition</p>
LED	Fortimo SLM 1206 L15 G7N		
LES / LED Size	Φ 14.5 mm		
FWHM (D50)	41°x47°		
Field Angle (D10)	75°x92°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	2368 lm	Measured @ 19.2 W	
Material	PC / UL94V2		

cd/klm

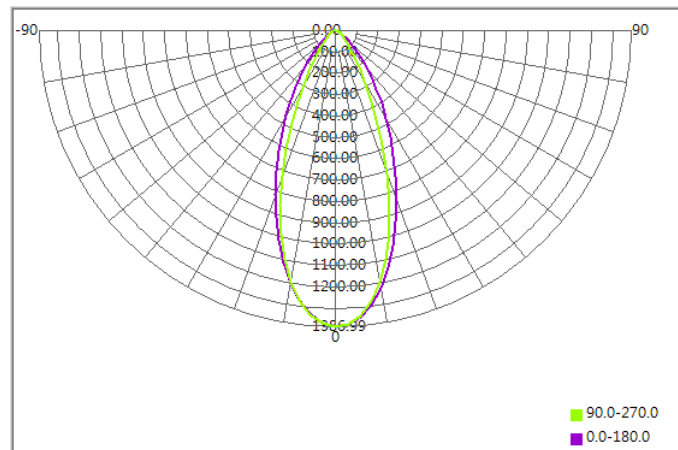

Illuminance At Distances

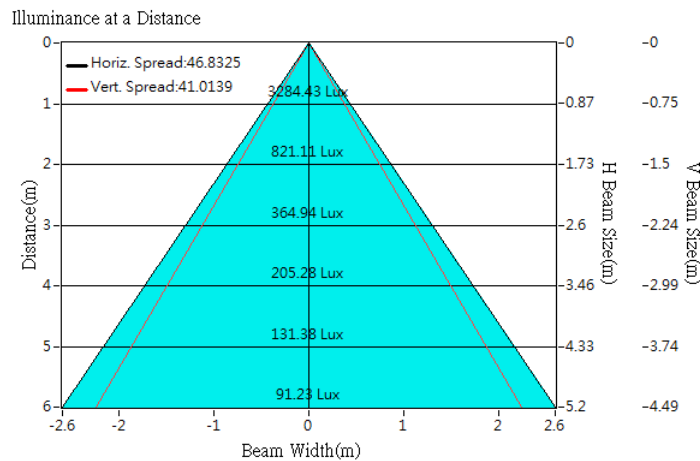





Optical Characteristics

Model Number	CKO-SA20-075026-0411		<p>"H" definition</p>
LED	Fortimo SLM 1208 L15 G7N		
LES / LED Size	Φ 14.5 mm		
FWHM (D50)	40°x47°		
Field Angle (D10)	75°x91°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	3366 lm	Measured @ 24.6 W	
Material	PC / UL94V2		

cd/klm

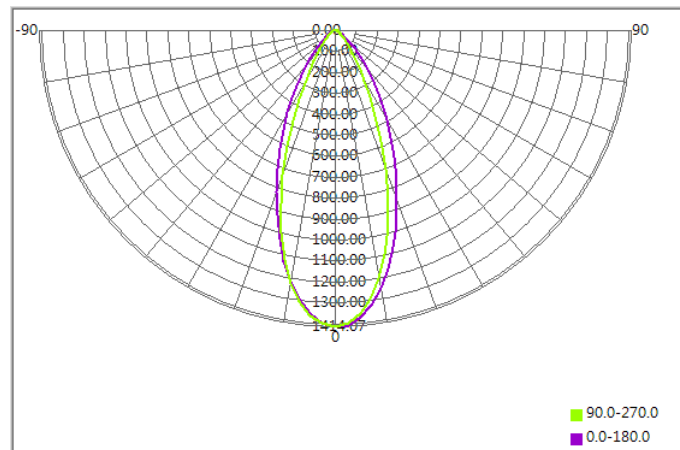

Illuminance At Distances

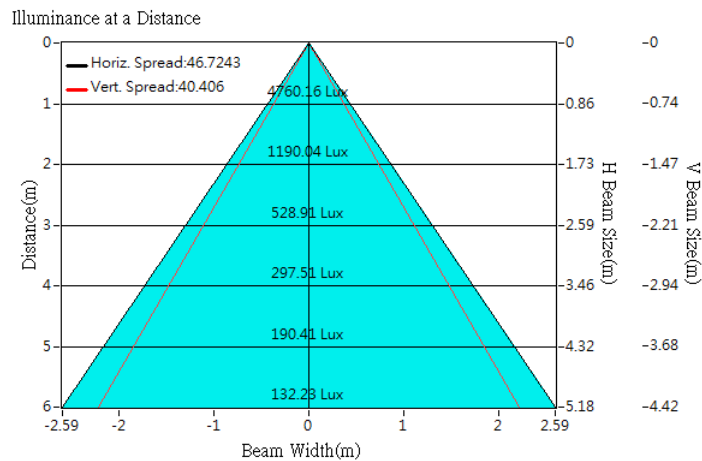





Optical Characteristics

Model Number	CKO-SA20-075026-0411		<p>"H" definition</p>
LED	Fortimo SLM 1210 L15 G7N		
LES / LED Size	Φ 14.5 mm		
FWHM (D50)	41°x47°		
Field Angle (D10)	75°x92°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	3640 lm	Measured @ 30.8 W	
Material	PC / UL94V2		

cd/klm

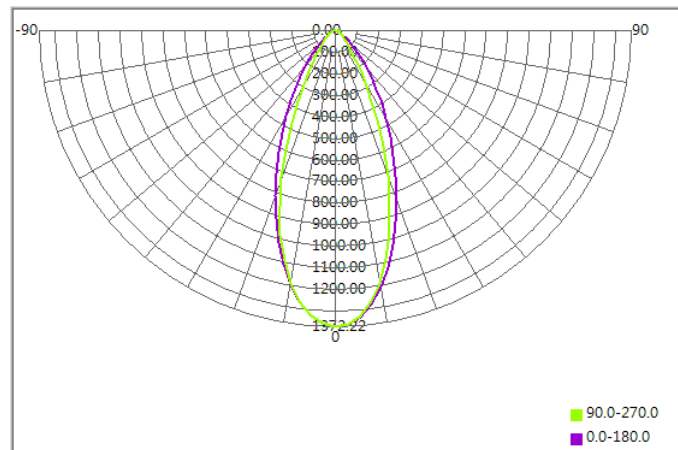

Illuminance At Distances

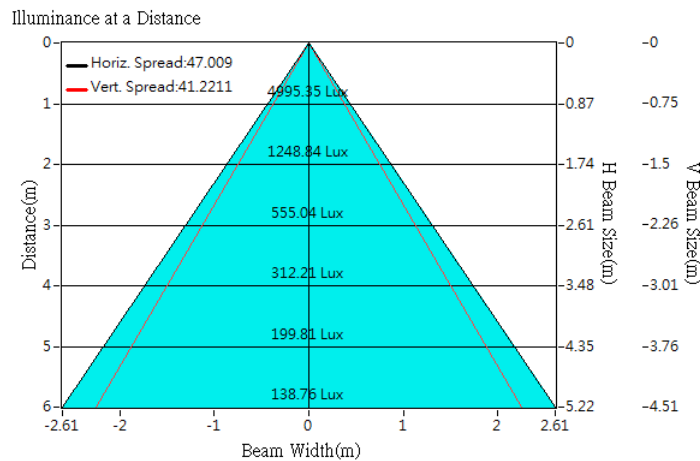





Optical Characteristics

Model Number	CKO-SA20-075026-0411		<p>"H" definition</p> <p>LES CoB</p>
LED	Fortimo SLM 1208 L15 G7		
LES / LED Size	Φ 15 mm		
FWHM (D50)	41°x47°		
Field Angle (D10)	75°x92°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	2651 lm	Measured @ 27 W	
Material	PC / UL94V2		

cd/klm

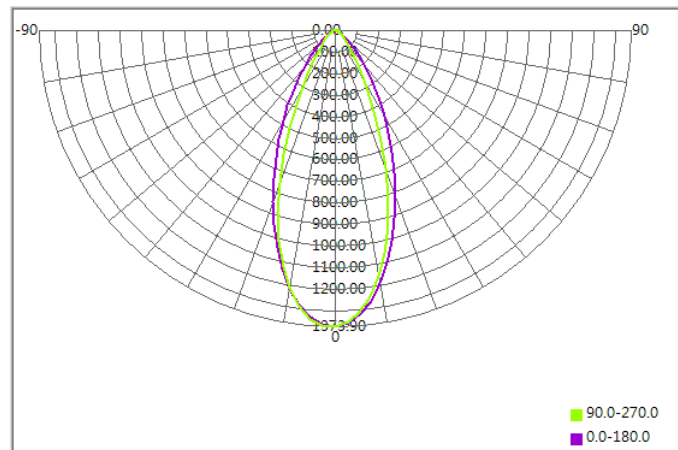

Illuminance At Distances

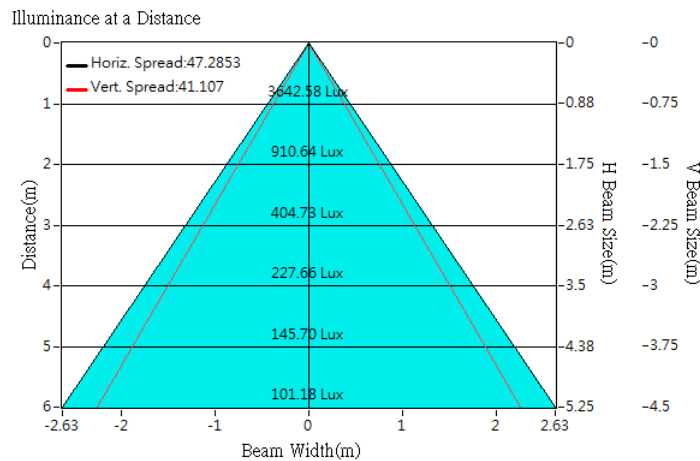




Optical Characteristics

Model Number	CKO-SA20-075026-0411		<p>"H" definition</p>
LED	Fortimo SLM 1208 L15 G6		
LES / LED Size	Φ 15 mm		
FWHM (D50)	41°x47°		
Field Angle (D10)	75°x91°		
H (distance)	3.65 mm		
Dimension	Φ =75mm, Thickness=25.4 mm		
Luminous Flux	2273 lm	Measured @ 26.5 W	
Material	PC / UL94V2		

cd/klm

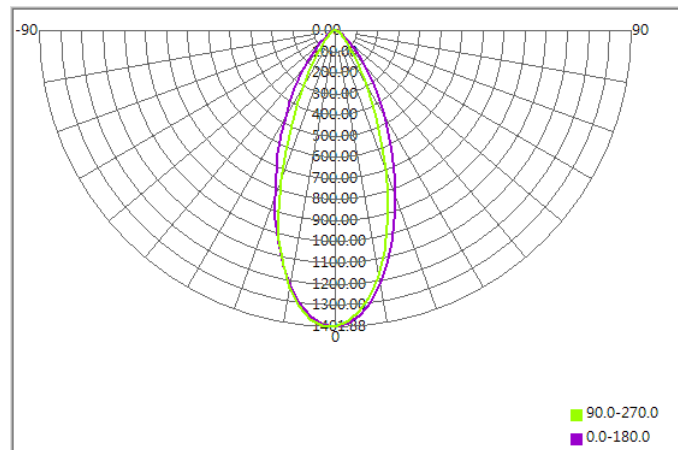

Illuminance At Distances

